




PROJECT NAME	
CATALOG NUMBER	
NOTES	
FIXTURE SCHEDULE	

LED FILAMENT HID REPLACEMENT LAMP

The LED Filament HID Replacement Lamp is a 34W, UL Type B, high flux density replacement for HID lamps. This lamp significantly reduces energy cost while providing a substantially longer life, operating on either AC or DC voltage: 120-277 VAC or 120-250 VDC. The lamp puts out 6,500 lumens without requiring a separate ballast, driver, or fan. Rated for enclosed fixtures with a 25,000 hour life, this lamp will operate between -40°F to 113°F. Ideal for outdoor and indoor applications, it replaces High Pressure Sodium, Metal Halide, Mercury Vapor, or older, lumen-depreciated LED corncob lamps. The lamp is non-dimmable, 5000K CCT, 80+ CRI, E39 mogul base, with ballast bypass operation.

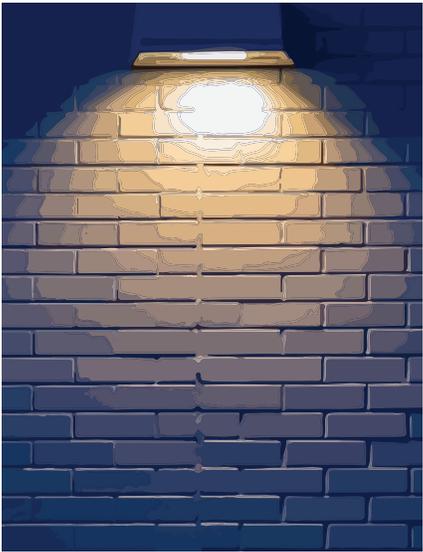

FEATURES

- AC or DC Operation
- Enclosed Fixture Rated
- Low Operating Cost
- Horizontal or Vertical operation
- Lightweight
- Indoor & Outdoor Use
- Suitable for Wet, Damp and Dry Locations
- Ballast By-Pass, Type B

APPLICATIONS

- Wall Packs
- Shoebox / Area Lights
- Parking Lots / Garages
- Amusement Parks
- Assembly Plants
- Construction Lights
- Manufacturing Plants
- Mines
- Municipal Facilities
- Oil Rigs
- Power Plants
- Roadway Lighting
- Steel Mills
- Underground Tunnels
- Warehouses

SPECIFICATIONS

PHYSICAL

Shape & Size:

ED28

Base Type:

E39 Mogul

Operating Temperature:

-40°F to 113°F

-40°C to 45°C

Rated Life (L70):

25,000

Dimensions:

8.9" MOL x 3.5" MOD

225mm MOL x 90mm MOD

Weight:

0.52 lbs

0.24 kg

ELECTRICAL

Watts:

34W

Voltage (AC):

120-277 VAC

Voltage (DC):

120-250 VDC

Surge Protection:

3kV

Dimming:

Non-Dimmable

CERTIFICATION

Environment:

- cULus for Wet, Damp, & Dry locations

- Enclosed fixture rated

Warranty:

- 5 Year Limited

ORDERING INFORMATION

Order Number	Model Number	Lumen	Watts	CCT (K)	Efficiency (lm/W)	Beam Angle	Dimmable
14001	HIDW34L6500C5R8NU	6,500	34W	5000K	191 lpW	Omni	No

Input Voltage	CRI	Case Pack Quantity	Case Weight
120-277 VAC 120-250 VDC	80+	6	5.3 lbs / 2.4 kg

DIMENSIONS

